

Modul Haus pro

mit horizontaler Mehrstufenpumpe




Technisches Datenblatt

Pumpe		pump	
max. Förderleistung	8 m³/h - 133,3 l/min	max. flowrate	
max. Förderhöhe	38 m	max. height	
max. Betriebsdruck	3,8 bar	max. operating pressure	
max. Leistungsaufnahme	0,75 kW	max. power consumption	
max. Arbeitsdruck	10 bar	max. working pressure	
max. Temperatur des geförderten Mediums	40 °C	max. temperature of pumped liquid	
Pumpenlaufräder (Material)	Edelstahl / stainless steel	Impeller (material)	
Pumpenschaft (Material)	Edelstahl / stainless steel	shaft of the pump (material)	
Pumpengehäuse (Material)	Edelstahl / Guss	pump body housing (material)	

Anschlüsse		connections	
Saugleitung	1 1/4" IG / female thread	suction side	
Druckleitung	1" IG / female thread	pressure side	
Trinkwasser	3/4" AG / male thread	potable water	

Netzanschluss		electric main supply	
Spannung	230 V	voltage	
Frequenz	50 Hz	frequency	

Abmessungen		measurements	
Breite	600 mm	width	
Höhe	730 mm	height	
Tiefe	345 mm	depth	
Gewicht	17,5 kg	weight	

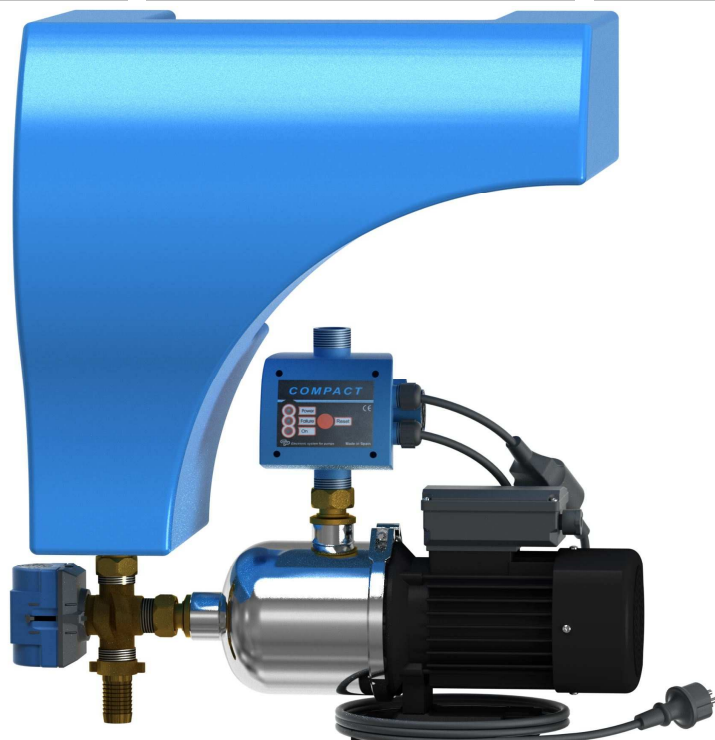

www.zisterne-XXL.de